



# Crime Prevention Products

Copsham House, 53 Broad Street,  
Chesham, Buckinghamshire, HP5 3EA

Tel : 01494 792592

Fax : 01494 792590



## WHITE SNAPLOCK WINDOW LOCK SUITABLE FOR PVCu

### PRODUCT CODE: CPP- LK14

#### To fit a PVCu Snaplock you will require:

a drill, 1.5mm drill bit and a posidriv screwdriver

(Please ensure the screws enclosed are suitable for application prior to use).

#### Easy fitting guide

**A** From inside the house, close the window and select the correct position of the PVCu Snaplock on the outward opening frame.

**B** Drill pilot holes using the PVCu Snaplock as a template. Drill through the frame and the inside wall of the frame. If you encounter a reinforced steel or aluminium section, drill through that section carefully so as not to touch the glass. Fix the PVCu Snaplock to the frame using suitable screws to ensure a tight fit. Once done, push the plastic screw cover over the screw head holes with a gentle push-fit.

**C** To ensure a tight fit of the finger to the frame when in the locked position, select a pad from those provided and press the pad into the hole provided in the finger. Take care that the fit is not so tight as to mark the PVCu frame.

#### Operation

##### - Keyed type

a. Insert key into lock barrel and 1/4 turn clockwise; the finger can then be rotated freely.

b. To lock the finger across the fixed part of the frame, remove the key and place somewhere safe and out-of-sight.

c. Turn the finger 1/4 turn until a click is heard.

The finger is now automatically snap-locked secure.

d. To free the window to open, insert the key and 1/4 turn clockwise.

The finger is now unlocked and can be freely rotated.





e. The key can now be removed by 1/4 turning it anti-clockwise and withdrawing it.

##### - Keyless type

a. Swing the finger over the fixed frame to stop the window opening.

b. To free the window to open, swing the finger back over the fixed base.

**Maintenance** - use a moist cloth only, household abrasives or solvents may affect surface finish - lubrication may occasionally be required.

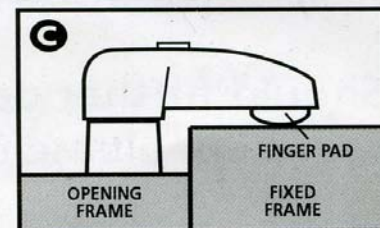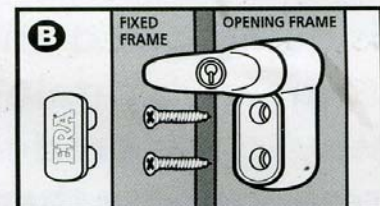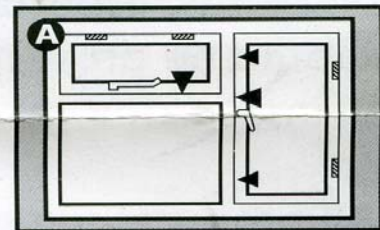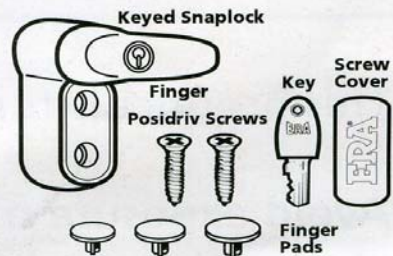

- ◀ Position if fitting a single lock.
- ◀ Position if fitting two locks.

Reduce the risk with ERA PRODUCTS LTD  
Call 01922 490000 for your FREE brochure  
[www.era-security.com](http://www.era-security.com)

**TECHNICAL HELPLINE**  
**01922 490 050**