



# Crime Prevention Products

Copsham House, 53 Broad Street,  
Chesham, Buckinghamshire, HP5 3EA  
Tel : 01494 792592 Fax : 01494 792590




## LKA – WINDOW SNAPLOCK

### CPP-LK13

#### ERA WINDOW SNAPLOCK

##### CONTENTS

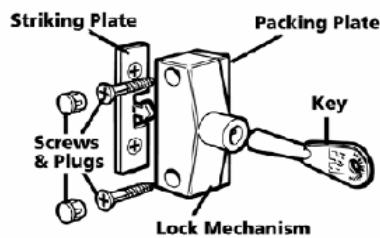


##### TOOLS REQUIRED

- Bradawl or 2.5mm drill
- Posidrive (Phillips) screwdriver
- Pencil


If fitting to hardwood drill 2.5mm pilot holes.

#### FITTING INSTRUCTIONS

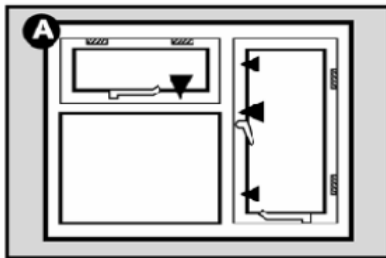

- A. Close window and select position of Snaplock(s). Lock should be fitted as close to the window fastener as possible.


- ◀ Position if fitting a single lock.
- ◀ Position if fitting two locks.

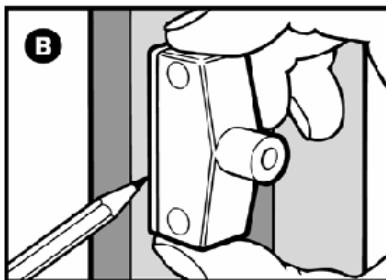

- B. Place lock mechanism onto the striking plate and mark position of striking plate on window edge.

Release lock mechanism from striking plate then screw striking plate onto window edge with cut out facing frame.

**CONTINUED**

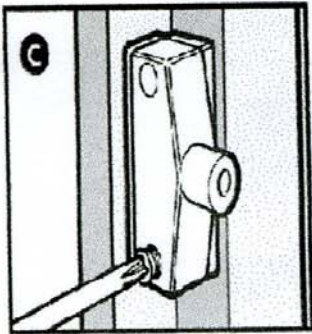

**C.** Snap the lock mechanism onto the fixed striking plate and mark screw positions. Remove lock body and drill pilot holes (opening the window if necessary). Snap the lock back onto striking plate.

If necessary use the packing plate under lock mechanism to ensure the lock body is parallel to window edge. Screw the lock mechanism to the frame. Check operation, then insert the plastic plugs into the lock body. Screw holes until flush.

**Operation** – the window locks automatically when window is closed. Turn key clockwise to release.

**Safety tip** - for child safety fit a Securistay to restrict the full opening.

**Security tips** - always close and lock windows, removing keys from locks when leaving the house. Use 2 locks per window for added security.